


E-911 Configuration Form



Length Configuration for Premade Cables

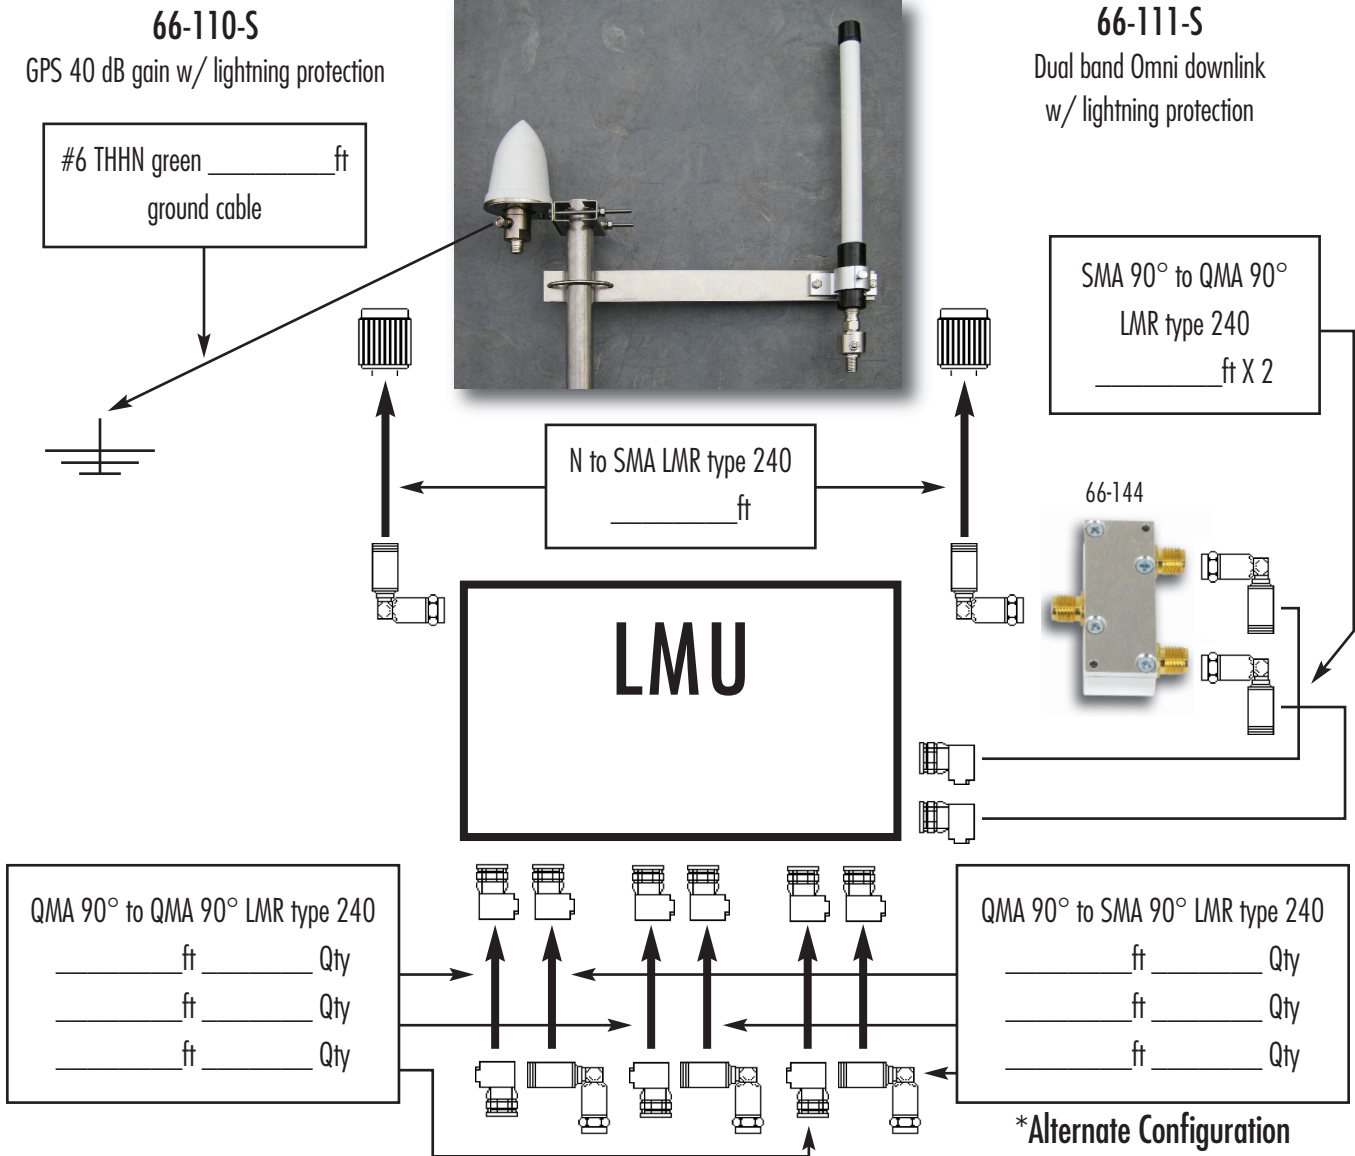

- 66-112 SMA 6dB Directional Coupler _____
- 3-3-07B-6-42556 SMA assemblies 6" _____
- 66-130 20dB SMA attenuators _____
- 66-133 10dB QMA attenuators _____
- _____
- _____

GSM/Radio

* GSM alternate configuration,
choose between SMA 90°
or QMA 90°

Site ID _____

Location _____

Site Type Indoor / Outdoor

Custom LMU Dual Band install kit



www.123eWireless.com • Tel: 949/888-5548 • Fax: 949/888-5582
Domestic Design & Manufacturing of Integrated Wireless Solutions